

THE CAPTIVATOR™ SYSTEM

AN IMPORTANT STEP TOWARD A NET-ZERO ENERGY CONSUMING WASTEWATER TREATMENT PLANT



PRODUCE MORE BIOGAS. CONSUME LESS ENERGY AND SPACE.

Introducing the Captivator™ System from Evoqua Water Technologies. It improves a conventional anaerobic process by capturing and converting BOD to biogas that otherwise requires aeration energy.

The system can be applied to both new and existing plants, and can tilt new plant economics to favor anaerobic digestion. It can:

- Generate up to 40% more biogas
- Reduce aeration energy up to 40%
- Lower capital costs by up to 20%
- Shift a plant's energy balance toward net-zero energy usage

In the Captivator System, primary clarification and separate sludge thickening is replaced with a modified contact stabilization process in front of a DAF. The contact stabilization process is an aerated contact tank that is fed both raw influent and waste activated sludge.

A CAPTIVATOR™ SYSTEM IS COMPRISED OF THREE TECHNOLOGIES

VLR® Aerated Contact Tank

Helps biomass absorb BOD. Low energy disc aeration is incorporated into a space efficient design.

Folded Flow® DAF

Efficiently removes and thickens the majority of the biomass and incoming SS. The DAF eliminates considerable footprint and capital costs associated with primary clarifiers and sludge thickeners. It also reduces grit sent to the digester and related maintenance costs.

Integrated Control System

Fine tunes performance of the system, provides seamless controls across technologies and eliminates unnecessary PLC's.


THE CAPTIVATOR™ SYSTEM KEY ADVANTAGES:

- Provides a cost effective alternative to primary clarifiers and separate sludge thickeners
- Reduces the footprint of an anaerobic plant
- Increases biogas production and reduces energy consumption
- Improves the economics of converting biogas to electricity

To speak with a technical expert or learn more about the Captivator System visit www.evoqua.com/captivator.

Toward Net-Zero Energy Use

Whereas a 30 MGD conventional plant might use 1000 KW of electricity in aeration, and only produce 500 KW from biogas, a plant with a Captivator System would only need 600 KW for aeration and could generate 700 KW from biogas. The additional biogas is generated by digesting captured BOD instead of treating it in a biological reactor. This frees up a portion of the tank volume required by a conventional process for biological treatment.

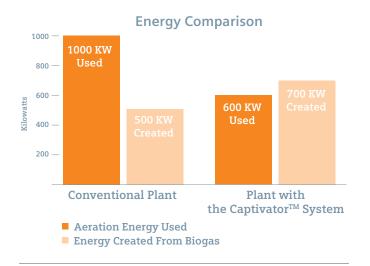

THE CAPTIVATOR™ SYSTEM CHANGES AN ANAEROBIC PLANT'S ENERGY BALANCE.



FLOWSHEET SOLUTIONS: TECHNOLOGY COMBINATIONS CREATE GREATER VALUE

The Captivator™ System can be combined with other technologies to create even greater process and project efficiency. For example, a Dystor® Gas Holder with JetMix™ Hydraulic Digester Mixing can be combined into a solution to increase gas storage, operational flexibility and digestion efficiency. Waste or direct heat generated from biogas can provide energy for a low temperature Sludge Belt Dryer. FlowSheet Solutions projects are strongly supported with cross technology experts and a dedicated point of contact.



210 Sixth Avenue, Suite 3300, Pittsburgh, PA 15222

+1 (866) 926-8420 (toll-free)

+1 (978) 614-7233 (toll)

www.evoqua.com

Captivator, Dystor, Folded Flow, JetMix and VLR are trademarks of Evoqua, its subsidiaries or affiliates in some countries.

The information provided in this brochure contains merely general descriptions or characteristics of performance which in actual case of use do not always apply as described or which may change as a result of further development of the products. An obligation to provide the respective characteristics shall only exist if expressly agreed in the terms of contract.

© 2017 Evoqua Water Technologies LLC Subject to change without notice