



Single Tank Design

3-Way Face Piping Configurations

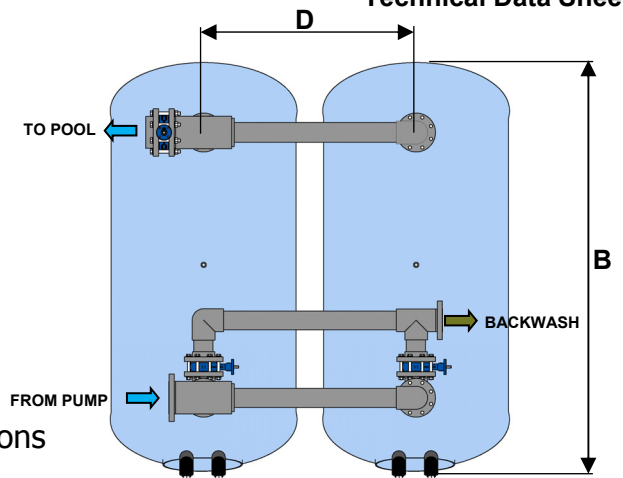

Side by Side (SxS) Dual Tank Design

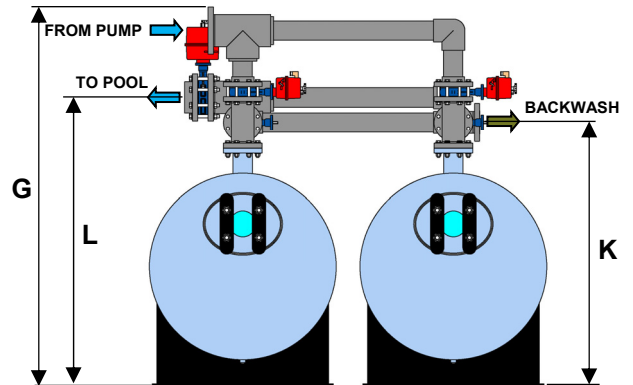

Face Piping Dimensions All dimensions are in inches and are for reference only				
Single Tank				
Mark	Tank Dia.	Face Piping Size		
		4	6	8
F	42	61 3/8	63 3/8	65 3/8
	48	67 1/8	69 1/8	69
	60	79 3/4	81 3/4	83 3/4

Face Piping Dimensions All dimensions are in inches and are for reference only					
Side by Side Tanks					
Mark	Tank Dia.	4x4	6x4	6x6	8x6
G	42	85 1/4	91 5/8	95	100 1/4
L	42	65	69 1/4	68 1/4	70 1/4
K	42	63 1/2	63 3/8	66 1/8	66 1/8
G	48	91	97 3/8	100 11/16	106
L	48	70 3/4	75	74	76
K	48	69 1/4	69 1/8	71 11/16	71 13/16
G	60	-	-	113 5/16	118 5/8
L	60	-	-	86 5/8	88 5/8
K	60	-	-	84 7/16	84 7/16


Filter Model Number	Tank Conn Size	Filter Area (SF)	Flow Capacity (GPM)	Filter Rate (GPM/SF)	Tank Shipping Weight (LBS)	Operating Weight (LBS)	All dimensions are in inches and are for reference only					
							A*	A1**	B	C	D	E
(*4248SHFFG-D	4	17.9	90-358	5-20	478	5354	42	44 1/4	70 1/2	55 1/4	49 1/2	38
(*4260SHFFG-D	4	21.4	107-342	5-16	562	6208	42	44 1/4	82 1/2	55 1/4	49 1/2	50
(*4260SHFFG-D	6	21.4	364-428	17-20	562	6208	42	44 1/4	82 1/2	55 1/4	49 1/2	50
(*4272SHFFG-D	4	24.9	125-349	5-14	604	7216	42	44 1/4	94 1/2	55 1/4	49 1/2	62
(*4272SHFFG-D	6	24.9	374-498	15-20	604	7216	42	44 1/4	94 1/2	55 1/4	49 1/2	62
(*4284SHFFG-D	4	28.4	142-341	5-12	653	8223	42	44 1/4	106 1/2	55 1/4	49 1/2	74
(*4284SHFFG-D	6	28.4	369-568	13-20	653	8223	42	44 1/4	106 1/2	55 1/4	49 1/2	74
(*4848SHFFG-D	4	22.3	112-357	5-16	622	7136	48	50 1/4	73 1/2	61	55 1/2	38
(*4860SHFFG-D	4	26.3	132-342	5-13	773	9605	48	50 1/4	85 1/2	61	55 1/2	50
(*4860SHFFG-D	6	26.3	368-526	14-20	773	9605	48	50 1/4	85 1/2	61	55 1/2	50
(*4872SHFFG-D	6	34.3	172-686	5-20	817	11039	48	50 1/4	97 1/2	61	55 1/2	62
(*4884SHFFG-D	6	38.3	192-766	5-20	715	10120	48	50 1/4	109 1/2	61	55 1/2	74
(*6048SHFFG-D	6	30.8	154-616	5-20	841	12460	60	63 1/2	80 1/2	73 5/8	68 1/2	44
(*6060SHFFG-D	6	35.8	179-716	5-20	918	14473	60	63 1/2	92 1/2	73 5/8	68 1/2	50
(*6072SHFFG-D	6	40.8	204-816	5-20	1010	16501	60	63 1/2	104 1/2	73 5/8	68 1/2	62
(*6084SHFFG-D	6	45.8	229-779	5-17	1082	18510	60	63 1/2	116 1/2	73 5/8	68 1/2	74

Note: All dimensions are based on fiberglass construction.
 Available in 50, 75 & 100 psi working pressure hydrostatically tested to 1.1 x working pressure and designed with a 4:1 safety factor.
 Consult Neptune-Benson for dimensional verification on custom fabricated vessels.
 All tanks include air relief and drain connections.

(*) Denotes quantity of tanks.
 Tank shipping weight includes manifold & internals.
 A* = Inside Diameter
 A1** = Maximum Outside Diameter



R 9/16/16

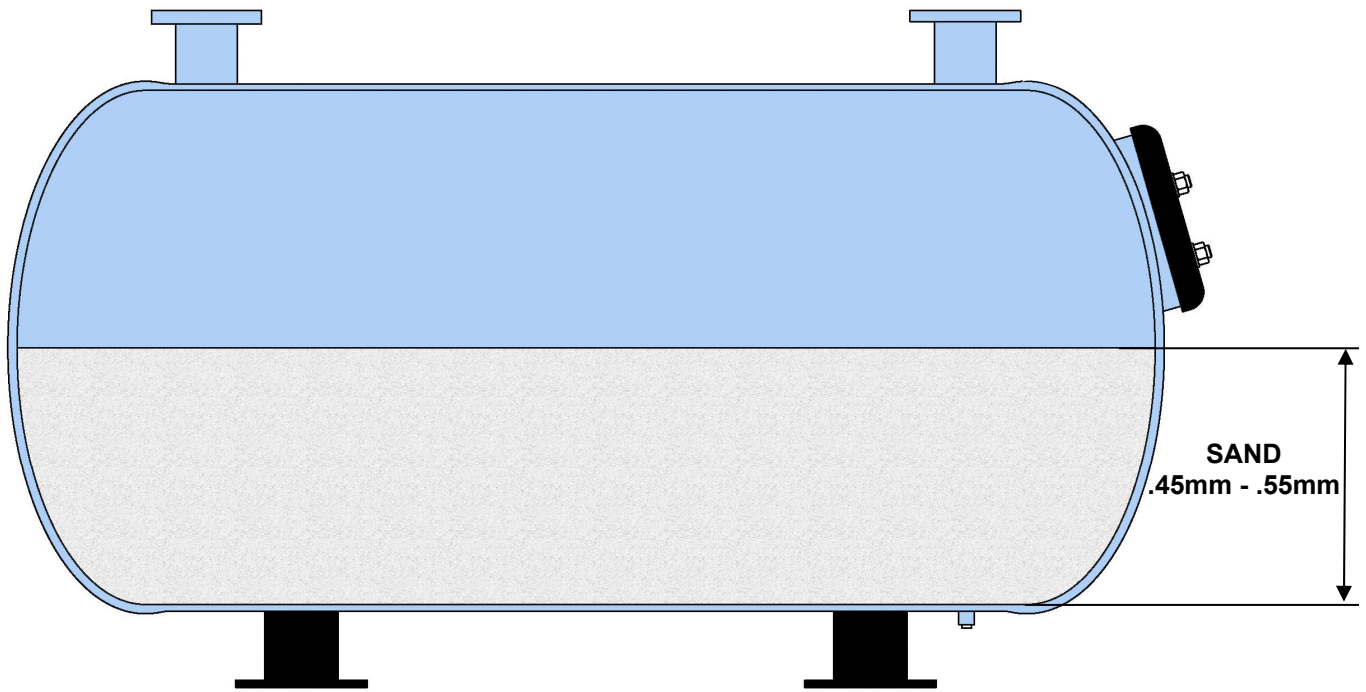

STANDARD MEDIA CHART

Note:
Sand is 100 lbs per cubic foot

All dimensions are in inches

Filter Model Number	Filter Sand (CF)	Filter Sand (LBS)	Bed Depth
(*)4248SHFFG-D	22	2200	21
(*)4260SHFFG-D	27	2700	21
(*)4272SHFFG-D	32	3200	21
(*)4284SHFFG-D	37	3700	21
(*)4848SHFFG-D	30	3000	24
(*)4860SHFFG-D	36	3600	24
(*)4872SHFFG-D	42	4200	24
(*)4884SHFFG-D	49	4900	24
(*)6048SHFFG-D	55	5500	30
(*)6060SHFFG-D	65	6500	30
(*)6072SHFFG-D	74	7400	30
(*)6084SHFFG-D	84	8400	30



R 9/16/16